


# TAG MODELS

Feature a contemporary look. Thanks to their aluminum design, they're easier and more economical to tow.

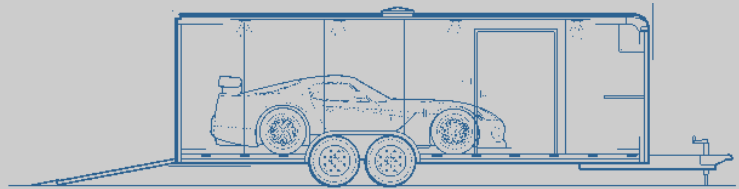

## POPULAR STANDARDS

- .050 rivetless exterior
- VHB fastenerless exterior
- 96" rear ramp door with spring assist, flap, heavy-duty hinge and polished stainless latches
- Beavertail
- 48" side door w/stepwell
- Electric brakes
- Insulated .030 aluminum interior walls and ceiling
- Extruded aluminum floor
- Stainless steel D-rings (4)
- Aluminum fenders
- Cast aluminum front corners
- Seamless aluminum roof

- Wiring harness
- Pre-wired for 110v
- Wire and framing for AC
- LED lights
- Non-powered roof vent
- Deluxe dome lights (4)
- 24" Stoneguard
- 2-5/16" coupler with 5000 lb. jack
- Triple tube tongue
- Available in white, black and red
- 6-year limited warranty

- Motorsports wheels
- Alcoa® aluminum wheels
- Wheel and axle upgrades
- Tire racks and slick hangers
- Power nose jack
- 12v and 110v electrical
- AC and heating options
- Generator and door
- 60" double side door
- Awnings
- Observation deck
- Custom cabinetry
- 60" ramp door extension
- Winch system
- Airline floor tie downs

## POPULAR OPTIONS

- Polished front end
- Polished extrusions
- Extra height

## SPECIFICATIONS

	<u>OP8520TA3</u>	<u>OP8524TA3</u>	<u>OP8524TTA3</u>	<u>OP8528TA4</u>	<u>OP8528TTA3</u>	<u>OP8532TTA4</u>
Overall length	24' 3"	28' 3"	28' 3"	32' 3"	32' 3"	36' 3"
Interior length	19' 10"	23' 10"	23' 10"	27' 10"	27' 10"	31' 10"
Interior width / BWW*	98" / 81"	98" / 81"	98" / 81"	98" / 81"	98" / 81"	98" / 81"
Interior height	6' 6-1/2"	6' 6-1/2"	6' 6-1/2"	6' 6-1/2"	6' 6-1/2"	6' 6-1/2"
Axles	5200 lb. tandem	5200 lb. tandem	5200 lb. triple	6000 lb. tandem	5200 lb. triple	6000 lb. triple
Ramp door opening	96"	96"	96"	96"	96"	96"
Frame	4" I-beam	4" I-beam	4" I-beam	4" I-beam	4" I-beam	4" I-beam
Tire size	LT235 80R16 LRD	LT235 80R16 LRD	LT235 80R16 LRD	LT235 85R16 LRE	LT235 80R16 LRD	LT235 85R16 LRE
Curb weight	4040 lb.	4760 lb.	5110 lb.	5450 lb.	5790 lb.	6474 lb.
GVWR	10400 lb.	10400 lb.	15600 lb.	12000 lb.	15600 lb.	18000 lb.
Payload capacity**	6360 lb.	5640 lb.	10490 lb.	6550 lb.	9810 lb.	11526 lb.
Exterior sidewalls	.050 rivetless	.050 rivetless	.050 rivetless	.050 rivetless	.050 rivetless	.050 rivetless

\*Between wheel wells. \*\*Optional equipment adds weight and lowers payload capacity.



# OPTIMA®



A PACE AMERICAN COMPANY  
paceamerican.com

224 INDUSTRIAL BLVD • EASTMAN, GA 31023 • TOLL FREE: 866 645 7223 • [www.optimatrailers.com](http://www.optimatrailers.com)

Optima Industries reserves the right to make changes at any time pursuant to colors, materials, models, specifications, options or pricing with out notice or obligation. All specifications are approximate and dimensions are nominal. Text may mention optional equipment which may not be included as standard items on your model of choice.